

100-20201,-D 28 Volts 260 Amps

PRODUCT SPECIFICATIONS

Part number	100-20201
System Voltage	24V
Rated Output	260A
Output @ 2000 rpm	165A
Ground	Negative
Mounting	J180 4"
Rotation	Bidirectional
Temperature limits:	
Low	- 40°C / -40°F
High	110°C / 230°F
High	125°C / 257°F (with fresh air intake)
Speed limits:	
	7000 RPM continuous
	8000 RPM intermittent
Coating	None
Weight	53 Lbs / 24 Kg.
Regulator	Integral
Excitation	Self-excited (@ 1500 rpm or less)
Diode Trio (D+)	Indicator Light (optional)
Remote Sense	M5 terminal
Relay/AC	M5 terminal

ACCESSORIES:

90° Elbow Pkg. (360° Rotatable) # 46900-1800

RECOMMENDED FOR:

- Marine
- Mining
- Construction
- Industrial

100-20201



100-20201-D


with air intake cover & Optional 90° elbow




NOTE:

*This DelStar **100-20201** alternator, meets the marine requirements for Ignition Protection on gas or diesel engines of ISO 8846, USCG, stated in Title 33 CFR 183.410, SAE J1171 and International CE Standards.*

PERFORMANCE CURVES

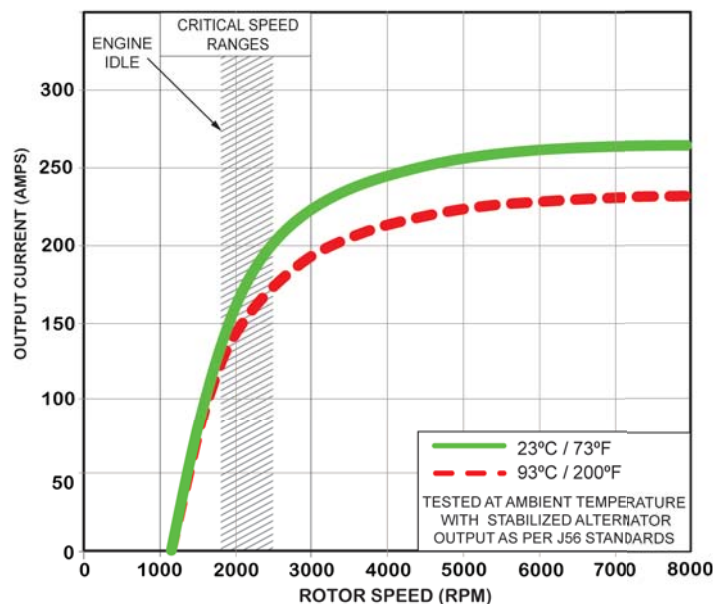


OUTLINE

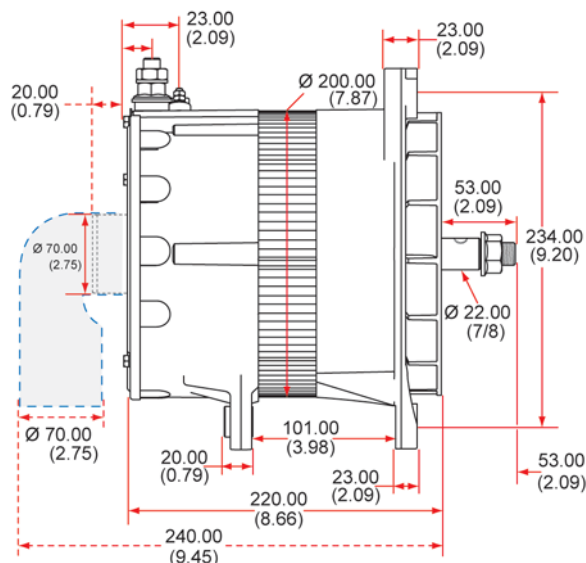

Dimensions are listed in mm over (in)

CONNECTIONS

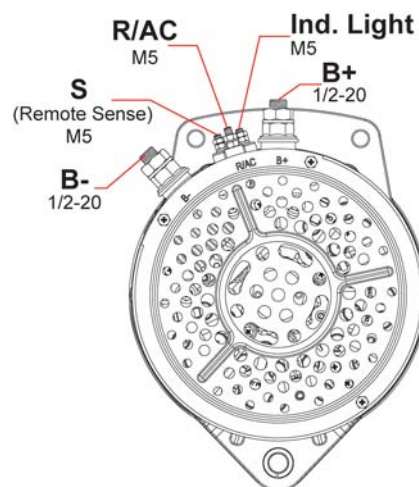


***All 200 Series with internal V. Regulator are self-excited. If the vehicle has an ignition (excite) circuit, cap the excite wire as it is not required.**

100-20201

28 Volts 260 Amps

ELECTRICAL SCHEMATIC

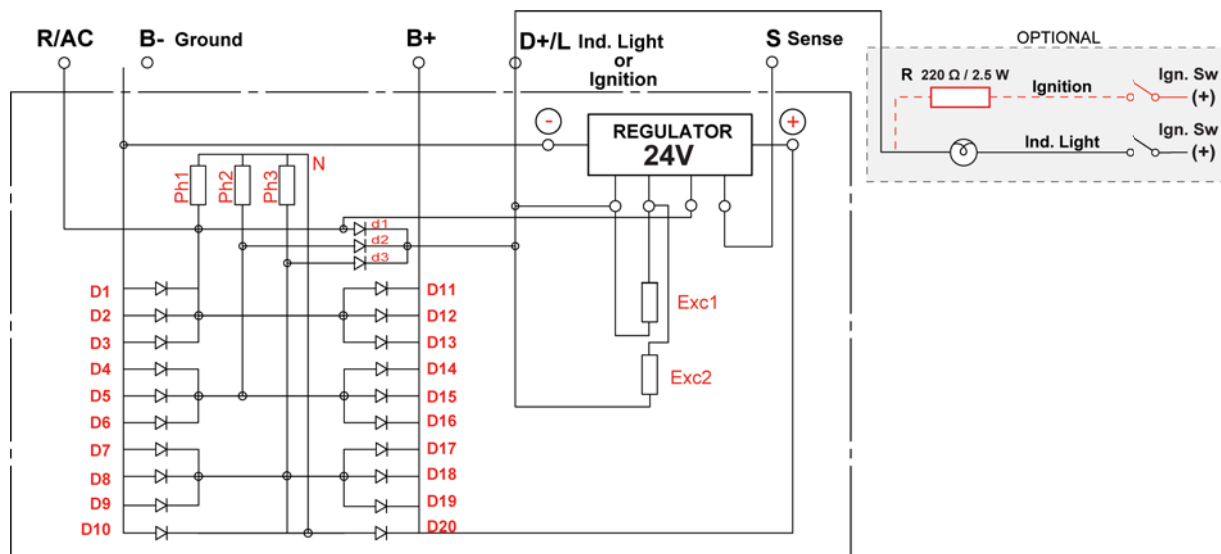

D100-20201 - 151028

CANADA & EXPORT SALES

Dixie Electric Ltd. Tel.: 905-879-0533 800-461-5799
517 Basaltic Road Fax: 905-879-0532
Concord, ON. E-Mail: sales@dixie-electric.com
Canada L4K 4W8 Web Site: www.dixie-electric.com



U.S.A. SALES

Dixie Electric Inc.
17100 Medina Rd, Suite 100
Minneapolis, MN.
U.S.A. 55447-1249

Tel.: 763-475-6629 800-478-0608
Fax: 763-475-6635 800-392-8719
E-Mail: mn.sales@dixie-electric.com
Web Site: www.dixie-electric.com