



DROP IN REPLACEMENT FOR 50DN™ TYPE

28 Volts 330 Amps

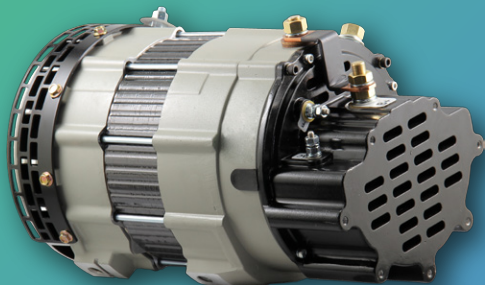

1300-40290

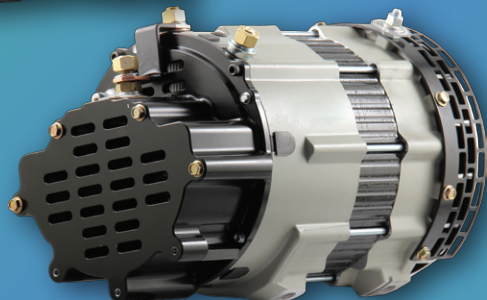

Also available with cables bracket

1300-40291



- LIGHTER & SMALLER
- UP TO 20% MORE AMPS
AT ALL CRITICAL SPEED RANGES
- A PERFECT DROP-IN FOR ALL
CRADLE MOUNT APPLICATIONS
- SIMPLE TO SERVICE AND UP TO 65%
LESS TIME REQUIRED

PRODUCT SPECIFICATIONS

Part number	1300-40290, 1300-40291*
System Voltage	24V
Rated Output	330A
Output @ 2000 rpm	225A
Ground	Negative
Mounting	Cradle
Rotation	Bidirectional
Temperature limits:	Low - 40°C / -40°F
	High 93°C / 200°F
Speed limits:	7000 RPM continuous
	8000 RPM intermittent
Coating	Corrosion-Resistant E-Coated
Weight	83.7 Lbs / 38 Kg.
Regulator	Remote
Relay/AC	1/4-28 terminal

NOTE:

This DelStar 1300-40290 alternator, meets the marine requirements for Ignition Protection on gas or diesel engines of ISO 8846, USCG, stated in Title 33 CFR 183.410, SAE J1171 and International CE Standards.


ACCESSORIES:

Oil Line Cap Kit # 4900-5000
(oil cooled to air cooled conversion)

RECOMMENDED FOR:


- Coach & Transit Busses
- Marine
- Mining
- Construction
- Industrial

OUTLINE

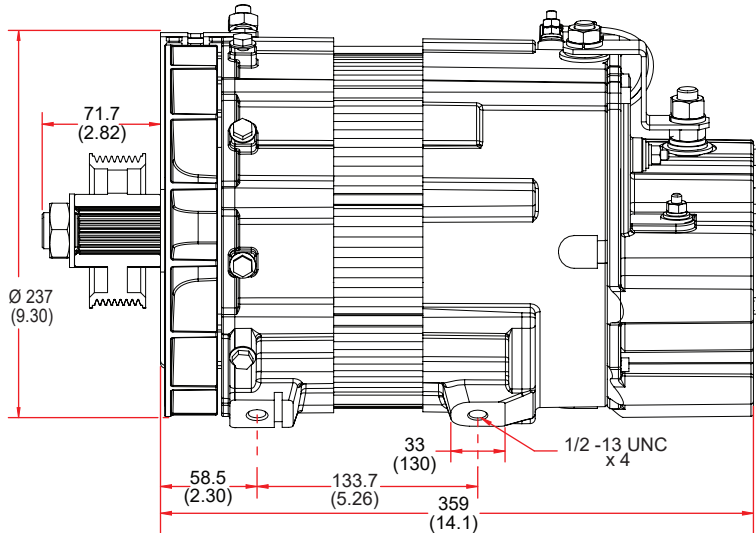

Dimensions are listed in mm over (in)

PERFORMANCE CURVES


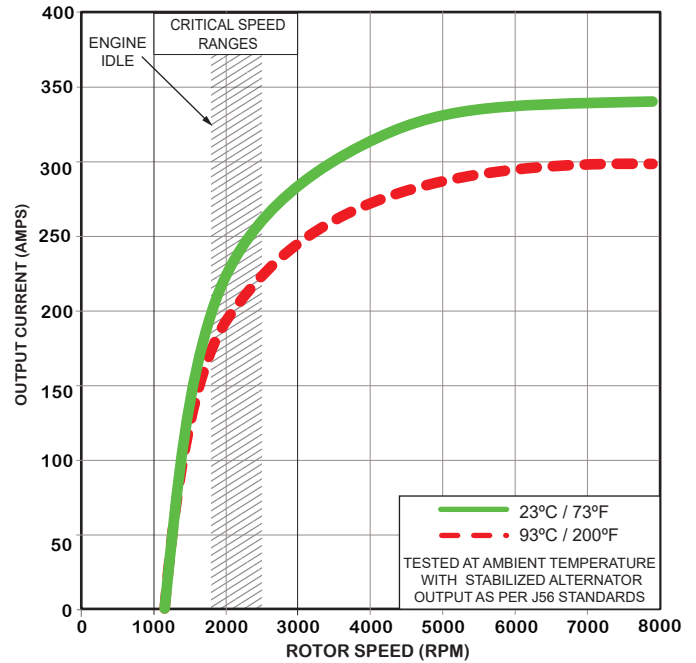


1300-40290

28 Volts 330 Amps

ELECTRICAL SCHEMATIC

CONNECTIONS

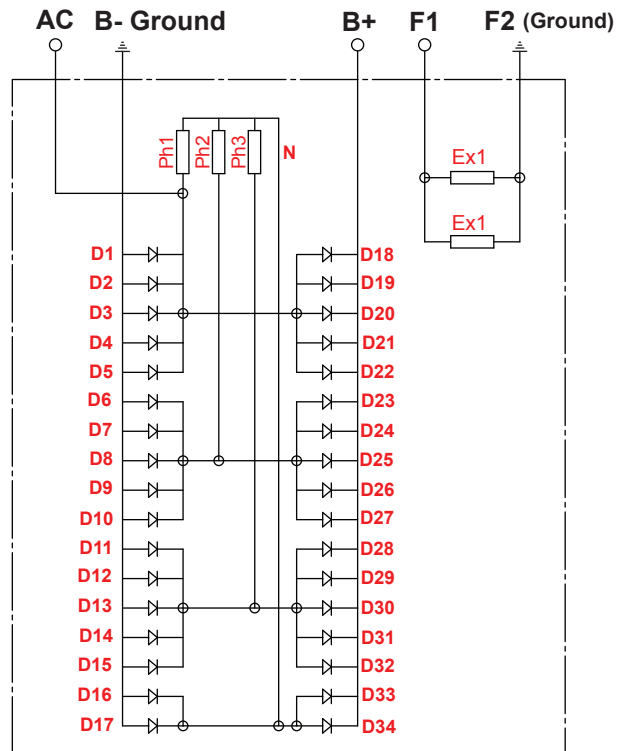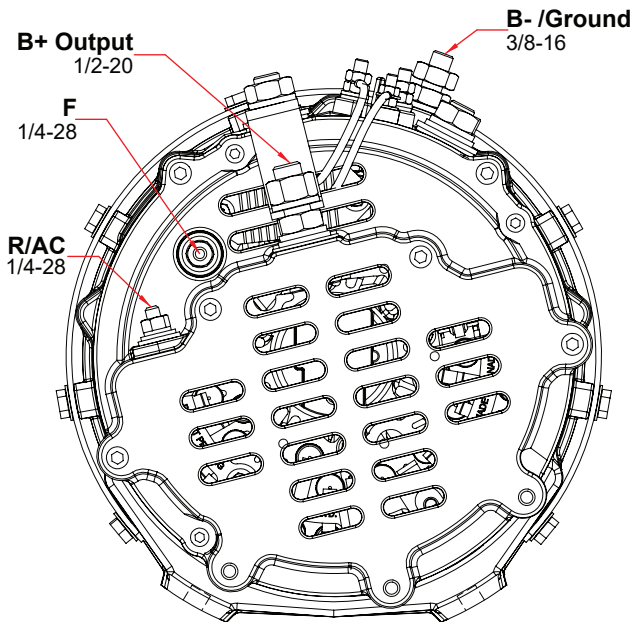

CANADA & EXPORT SALES

Dixie Electric Ltd.
517 Basaltic Road
Concord, ON L4K 4W8
CANADA

Tel.: 905-879-0533 800-461-5799
Fax: 905-879-0532
sales@dixie-electric.com
www.dixie-electric.com



U.S.A. SALES

Dixie Electric Inc.
5600 Pioneer Creek Drive, Suite D
Maple Plain, MN 55359
U.S.A.

Tel.: 763-475-6629 800-478-0608
Fax: 763-475-6635 800-392-8719
E-Mail: mn.sales@dixie-electric.com
Web Site: www.dixie-electric.us